



**Technical and Test Institute
for Construction Prague**

Prosecká 811/76a
190 00 Prague
Czech Republic
eota@tzus.cz



Member of



www.eota.eu

European Technical Assessment

**ETA 17/0005
of 20/02/2017**

Technical Assessment Body issuing the ETA: Technical and Test Institute
for Construction Prague

Trade name of the construction product

Injection system Hilti HIT-1 / HIT-1 CE

**Product family to which the
construction product belongs**

Product area code: 33
Bonded injection type anchor for use in
non-cracked concrete

Manufacturer

Hilti AG
Feldkircherstraße 100
9494 Schaan
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant(s)

Hilti Werke

**This European Technical Assessment
contains**

16 pages including 11 Annexes which form
an integral part of this assessment.

**This European Technical Assessment is
issued in accordance with regulation
(EU) No 305/2011, on the basis of**

ETAG 001-Part 1 and Part 5, edition 2013,
used as European Assessment Document
(EAD)

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body - Technical and Test Institute for Construction Prague. Any partial reproduction has to be identified as such

1. Technical description of the product

The Injection system Hilti HIT-1 / HIT-1 CE polyester resin styrene-free for non-cracked concrete is a bonded anchor consisting of a cartridge with injection mortar and a steel element. The steel elements consists of a commercial threaded rods, a hexagon nut and a washer. The steel elements are made of galvanized steel or stainless steel.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The illustration and the description of the product are given in Annex A.

2. Specification of the intended use in accordance with the applicable EAD

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for tension loads	See Annex C 1
Characteristic resistance for shear loads	See Annex C 2
Displacement	See Annex C 3

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

3.3 Hygiene, health and environment (BWR 3)

Regarding dangerous substances contained in this European Technical Assessment, there may be requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

For basic requirement safety in use the same criteria are valid as for Basic Requirement Mechanical resistance and stability.

3.5 Sustainable use of natural resources (BWR 7)

For the sustainable use of natural resources no performance was determined for this product.

3.6 General aspects relating to fitness for use

Durability and serviceability are only ensured if the specifications of intended use according to Annex B 1 are kept.

4. **Assessment and verification of constancy of performance (AVCP) system applied with reference to its legal base**

According to the Decision 96/582/EC of the European Commission¹ the system of assessment verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table applies.

Product	Intended use	Level or class	System
Metal anchors for use in concrete	For fixing and/or supporting to concrete, structural elements (which contributes to the stability of the construction works) or heavy units	-	1

5. **Technical details necessary for the implementation of the AVCP system, as provided in the applicable EAD**

5.1 **Tasks of the manufacturer**

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall insure that the product is in conformity with this European Technical Assessment.

The manufacturer may only use raw materials stated in the technical documentation of this European Technical Assessment.

The factory production control shall be in accordance with the control plan which is a part of the technical documentation of this European Technical Assessment. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited at Technický a zkušební ústav stavební Praha, s.p.² The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

The manufacturer shall, on the basis of a contract, involve a body which is notified for the tasks referred to in section 4 in the field of anchors in order to undertake the actions laid down in section 5.2. For this purpose, the control plan referred to in this section and section 5.2 shall be handed over by the manufacturer to the notified body involved.

The manufacturer shall make a declaration of performance, stating that the construction product is in conformity with the provisions of this European Technical Assessment.

¹ Official Journal of the European Communities L 254 of 08.10.1996

² The control plan is a confidential part of the documentation of the European Technical Assessment, but not published together with the ETA and only handed over to the approved body involved in the procedure of AVCP.

5.2 Tasks of the notified bodies

The notified body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The notified certification body involved by the manufacturer shall issue a certificate of constancy of performance of the product stating the conformity with the provisions of this European Technical assessment.

In cases where the provisions of the European Technical Assessment and its control plan are no longer fulfilled the notified body shall withdraw the certificate of constancy of performance and inform Technický a zkušební ústav stavební Praha, s.p without delay.

Issued in Prague on 20.02.2017


By

Ing. Mária Schaan

Head of the Technical Assessment Body

Installed condition

Figure A1:
Threaded rod, HIT-V-...

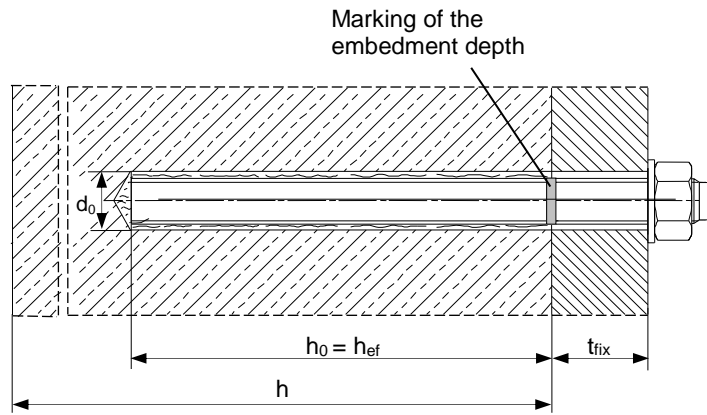

Injection system Hilti HIT-1 / HIT-1 CE

Product description
Installed conditions


Annex A 1

Product description: Injection mortar and steel elements

Injection mortar Hilti HIT-1 / HIT-1 CE: hybrid system with aggregate

300 ml

Marking:
HILTI HIT
Production number and
production line
Expiry date mm/yyyy

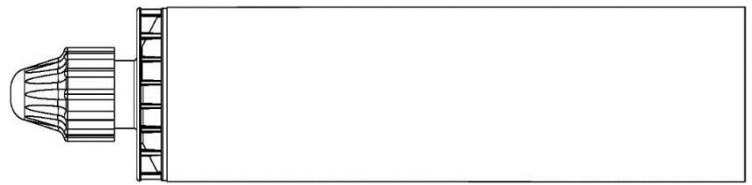


Product name: "Hilti HIT-1 / HIT-1 CE"

Static mixer Hilti HIT PM



Steel elements

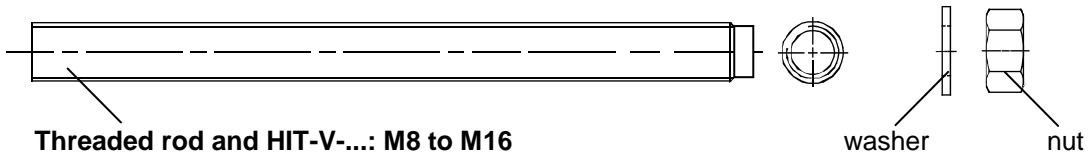

Commercial standard threaded rod with:

- Materials and mechanical properties according to Table A1.
- Inspection certificate 3.1 according to EN 10204:2004. The document shall be stored.
- Marking of embedment depth.

Injection system Hilti HIT-1 / HIT-1 CE

Product description
Injection mortar / Static mixer / Steel elements

Annex A 2

Table A1: Materials

Designation	Material
Metal parts made of zinc coated steel	
Threaded rod, HIT-V-5.8(F)	Strength class 5.8, $f_{uk} = 500 \text{ N/mm}^2$, $f_{yk} = 400 \text{ N/mm}^2$ Elongation at fracture ($l_0 = 5d$) > 8% ductile Electroplated zinc coated $\geq 5 \mu\text{m}$, (F) hot dip galvanized $\geq 45 \mu\text{m}$
Threaded rod, HIT-V-8.8(F)	Strength class 8.8, $f_{uk} = 800 \text{ N/mm}^2$, $f_{yk} = 640 \text{ N/mm}^2$ Elongation at fracture ($l_0 = 5d$) > 12% ductile Electroplated zinc coated $\geq 5 \mu\text{m}$, (F) hot dip galvanized $\geq 45 \mu\text{m}$
Washer	Electroplated zinc coated $\geq 5 \mu\text{m}$, hot dip galvanized $\geq 45 \mu\text{m}$
Nut	Strength class of nut adapted to strength class of threaded rod Electroplated zinc coated $\geq 5 \mu\text{m}$, hot dip galvanized $\geq 45 \mu\text{m}$
Metal parts made of stainless steel	
Threaded rod, HIT-V-R	strength class 70, $f_{uk} = 700 \text{ N/mm}^2$, $f_{yk} = 450 \text{ N/mm}^2$ Elongation at fracture ($l_0 = 5d$) > 8% ductile Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
Washer	Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
Nut	Strength class of nut adapted to strength class of threaded rod Stainless steel 1.4401, 1.4404, 1.4578, 1.4571, 1.4439, 1.4362 EN 10088-1:2014
Metal parts made of high corrosion resistant steel	
Threaded rod, HIT-V-HCR	$f_{uk} = 800 \text{ N/mm}^2$, $f_{yk} = 640 \text{ N/mm}^2$ Elongation at fracture ($l_0 = 5d$) > 8% ductile High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014
Washer	High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014
Nut	Strength class of nut adapted to strength class of threaded rod High corrosion resistant steel 1.4529, 1.4565 EN 10088-1:2014

Injection system Hilti HIT-1 / HIT-1 CE	Annex A 3
Product description Materials	

Specifications of intended use

Anchorage subject to:

- Static and quasi static loading.



Base material:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2013.
- Strength classes C20/25 to C50/60 according to EN 206-1:2013.
- Non-cracked concrete

Temperature in the base material:

- **at installation**
+ 5 °C to +40 °C
- **in-service**
Temperature range I: - 40 °C to +40 °C
(max long term temperature +24 °C and max short term temperature +40 °C)
Temperature range II: - 40 °C to +80 °C
(max long term temperature +50 °C and max short term temperature +80 °C)

Table B1: Specifications of intended use

		HIT-1 / HIT-1 CE with ...
Elements		HIT-V-... 
Hammer drilling 		✓
Use category	Dry or wet concrete	✓
Static and quasi static loading in non-cracked concrete		M8 to M16

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal conditions, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal conditions, if other particular aggressive conditions exist (high corrosion resistant steel).
Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Injection system Hilti HIT-1 / HIT-1 CE	Annex B 1
Intended use Specifications	

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed in accordance with: "EOTA Technical Report TR 029, 09/2010" or "CEN/TS 1992-4:2009"

Installation:

- Use category: dry or wet concrete (not in flooded holes)
- Overhead installation is admissible.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site

Injection system Hilti HIT-1 / HIT-1 CE	Annex B 2
Intended use Specifications	

Table B2: Installation parameters for threaded rod, HIT-V-...


Threaded rod, HIT-V-...			M 8	M 10	M 12	M 16
Diameter of element	$d^{1)}=d_{nom}^{2)}$	[mm]	8	10	12	16
Nominal diameter of drill bit	d_0	[mm]	10	12	14	18
Effective embedment depth an drill hole depth	$h_{ef} = h_0$	[mm]	60 to 160	60 to 200	70 to 240	80 to 320
Maximum diameter of clearance hole in the fixture ³⁾	d_f	[mm]	9	12	14	18
Diameter of steel brush	d_b	[mm]	10	12	14	18
Minimum thickness of member	h_{min}	[mm]	$h_{ef} + 30 \text{ mm}$ $\geq 100 \text{ mm}$			$h_{ef} + 2d_0$
Maximum torque moment	T_{max}	[Nm]	10	20	40	80
Minimum spacing	s_{min}	[mm]	40	50	60	80
Minimum edge distance	c_{min}	[mm]	40	50	60	80

1) Parameter for design according to "EOTA Technical Report TR 029".

2) Parameter for design according to "CEN/TS 1992-4:2009".

3) For larger clearance hole see TR 029, section 1.1.

HIT-V-...

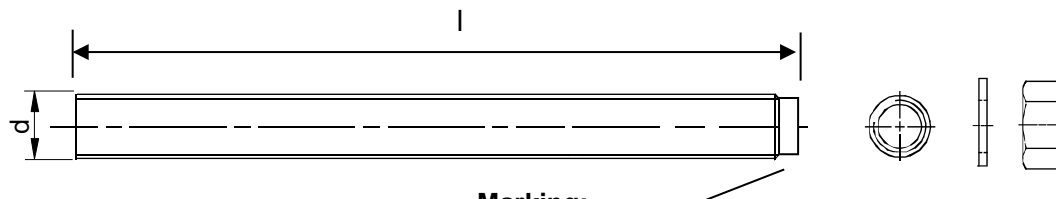

Marking:

5.8 - l = HIT-V-5.8 M...x l

5.8F - l = HIT-V-5.8F M...x l

8.8 - l = HIT-V-8.8 M...x l

8.8F - l = HIT-V-8.8F M...x l

R - l = HIT-V-R M...x l

HCR - l = HIT-V-HCR M...x l

Injection system Hilti HIT-1 / HIT-1 CE

Intended use

Installation parameters of threaded rod, HIT-V-...





Annex B 3

Table B3: Maximum working time and minimum curing time ¹⁾

Temperature in the base material T	Maximum working time t _{work}	Minimum curing time t _{cure}
-5 °C to -1 °C	1,5 hours	6 hours
0 °C to +4 °C	45 min	3 hours
+5 °C to +9 °C	25 min	2 hours
+10 °C to +14 °C	20 min	100 min
+15 °C to +19 °C	15 min	80 min
+20 °C to +29 °C	6 min	45 min
+30 °C to +34 °C	4 min	25 min
+35 °C to +39 °C	2 min	20 min

¹⁾ The curing time data are valid for dry base material only.
In wet base material the curing times must be doubled.

Table B4: Parameters of cleaning and setting tools

Elements	Drill and clean		Installation
Threaded Rod, HIT-V-...	Hammer drilling	Brush	Piston plug
			
size	d ₀ [mm]	HIT-RB	HIT-SZ
M8	10	10	10
M10	12	12	12
M12	14	14	14
M16	18	18	18

Cleaning alternatives

Manual Cleaning with Machine

Brushing (MCMB):

Hilti hand pump for blowing out drill holes with diameters d₀ ≤ 20 mm and drill hole depths h₀ ≤ 10·d



Compressed Air Cleaning with Machine Brushing (CACMB):

Air nozzle with an orifice opening of minimum 3,5 mm in diameter (min. 6 bar).



Injection system Hilti HIT-1 / HIT-1 CE

Intended use


Maximum working time and minimum curing time
Parameters of cleaning and setting tools

Annex B 4

Installation instruction

Hole drilling

Hammer drilling

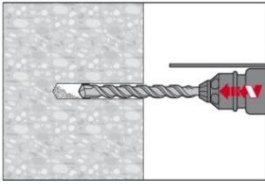


Drill with hammer drill a hole into the base material to the size and embedment depth required by the selected anchor (Table B2). In case of aborted drill hole: the drill hole shall be filled with mortar.

Drill hole cleaning

Just before setting an anchor, the drill hole must be free of dust and debris. Inadequate hole cleaning = poor load values.


Manual Cleaning with Machine Brushing (MCMB)

for drill hole diameters $d_0 \leq 20$ mm and drill hole depths $h_0 \leq 10 \cdot d$

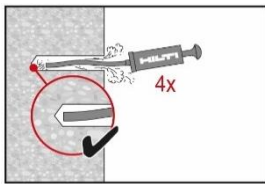


The Hilti hand pump may be used for blowing out drill holes up to diameters $d_0 \leq 20$ mm and embedment depths up to $h_{ef} \leq 10 \cdot d$.

Blow out at least 4 times from the back of the drill hole until return air stream is free of noticeable dust.

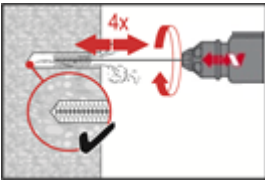

Check brush diameter (Table B2) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized HIT-RB wire brush (Table B4) a minimum of four times.


The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.

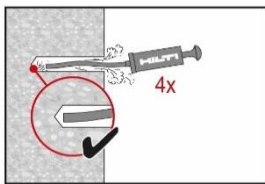

Blow out again with the Hilti hand pump at least 4 times until return air stream is free of noticeable dust.


Compressed Air Cleaning with Machine Brushing (CACMB)

for all drill hole diameters d_0 and all drill hole depths h_0

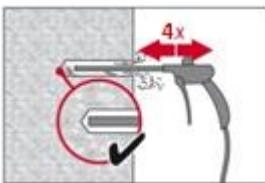

Blow 4 times from the back of the hole (if needed with nozzle extension) over the hole length with oil-free compressed air (min. 6 bar at 6 m³/h) until return air stream is free of noticeable dust.

For drill hole diameters ≥ 32 mm the compressor has to supply a minimum air flow of 140 m³/h.

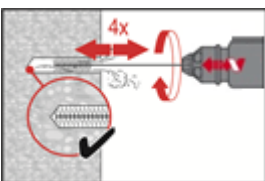

Check brush diameter (Table B2) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized HIT-RB wire brush (Table B4) a minimum of four times.

The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.




Blow again with compressed air 4 times until return air stream is free of noticeable dust.

Injection system Hilti HIT-1 / HIT-1 CE


Intended use
Installation instructions

Annex B 5

Injection preparation

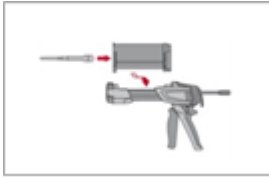


Tightly attach new Hilti mixing nozzle HIT PM to foil pack manifold (snug fit). Do not modify the mixing nozzle.
Observe the instruction for use of the dispenser.
Check foil pack holder for proper function. Do not use damaged foil packs / holders.
Insert foil pack into foil pack holder and put holder into HIT-dispenser.

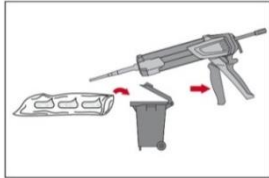


Prior to dispensing into the drill hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For foil tube cartridges it must be discarded a minimum of six full strokes.


Inject adhesive from the back of the drill hole without forming air voids.

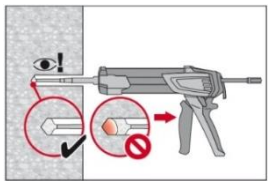

Inject the adhesive starting at the back of the hole, slowly withdrawing the mixer with each trigger pull.
Fill approximately 2/3 of the drill hole to ensure that the annular gap between the anchor and the concrete is completely filled with adhesive along the embedment length.

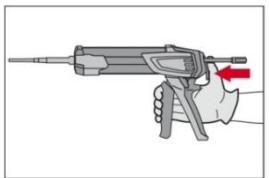


After injection is completed, depressurize the dispenser by pressing the release trigger. This will prevent further adhesive discharge from the mixer.

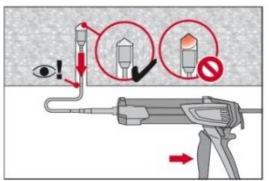


Overhead installation and/or installation with embedment depth $h_{ef} > 250\text{mm}$.
For overhead installation the injection is only possible with the aid of extensions and piston plugs. Assemble HIT PM mixer, extension(s) and appropriately sized piston plug (see Table B4). Insert piston plug to back of the hole and inject adhesive.
During injection the piston plug will be naturally extruded out of the drill hole by the adhesive pressure.


Setting the element

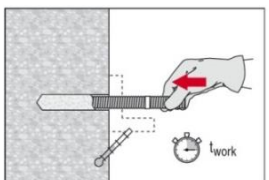

Before use, verify that the element is dry and free of oil and other contaminants.
Mark and set element to the required embedment depth until working time t_{work} has elapsed. The working time t_{work} is given in Table B3.

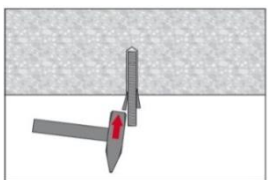

For overhead installation use piston plugs and fix embedded parts with e.g. wedges.

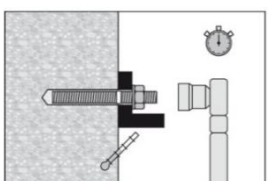

Loading the anchor: After required curing time t_{cure} (see Table B3) the anchor can be loaded.
The applied installation torque shall not exceed the values T_{max} given in Table B2.

Injection system Hilti HIT-1 / HIT-1 CE

Intended use
Installation instructions

Annex B 6

**Table C1: Characteristic values of resistance for threaded rod, HIT-V...
under tension loads in non-cracked concrete**

HIT-1 / HIT-1 CE with threaded rod, HIT-V...			M 8	M 10	M 12	M 16
Installation safety factor	$\gamma_2^{1)} = \gamma_{inst}^{2)}$	[-]	1,2			
Steel failure						
Characteristic tension resistance	$N_{Rk,s}$	[kN]	$A_s \cdot f_{uk}$			
Combined pullout and concrete cone failure						
Characteristic bond resistance in non-cracked concrete C20/25						
Temperature range I: 40°C/24°C	$\tau_{Rk,ucr}$	[N/mm ²]	7,0	7,0	7,0	6,0
Temperature range II: 80°C/50°C	$\tau_{Rk,ucr}$	[N/mm ²]	5,0	5,0	5,0	4,5
Factor according to Section 6.2.2.3 of CEN/TS 1992-4: 2009 part 5	$k_8 = k_{ucr}^{2)}$	[-]	10,1			
Increasing factors for concrete	ψ_c	C25/30	1,04			
		C30/37	1,08			
		C35/45	1,13			
		C40/50	1,15			
		C45/55	1,17			
		C50/60	1,19			
Splitting failure						
Edge distance $C_{cr,sp}$ [mm] for	$h / h_{ef} \geq 2,0$		1,0 · hef			
	$2,0 > h / h_{ef} > 1,3$		4,6 hef - 1,8 h			
	$h / h_{ef} \leq 1,3$		2,26 hef			
Spacing	$S_{cr,sp}$	[mm]	2 $C_{cr,sp}$			

1) Parameter for design according to EOTA Technical Report TR 029.

2) Parameter for design according to CEN/TS 1992-4:2009.

Injection system Hilti HIT-1 / HIT-1 CE

Performances

Characteristic values of resistance under tension loads in non-cracked concrete
Design according to „EOTA Technical Report TR 029, 09/2010“ or “CEN/TS 1992-4:2009”

Annex C 1

**Table C2: Characteristic values of resistance for threaded rod, HIT-V-...
under shear loads in non-cracked concrete**

HIT-1 / HIT-1 CE with threaded rod, HIT-V-...			M 8	M 10	M 12	M 16
Steel failure without lever arm						
Factor according to Section 6.3.2.1 CEN/TS 1992-4: 2009 part 5	k_2	[-]	0,8			
Characteristic shear resistance	$V_{Rk,s}$	[kN]	$0,5 \cdot A_s \cdot f_{uk}$			
Steel failure with lever arm						
Characteristic bending moment	$M^0_{Rk,s}$	[Nm]	$1,2 \cdot W_{el} \cdot f_{uk}$			
Concrete pry-out failure						
Factor acc. to equation (5.7) of TR 029 or acc. to equation (27) of CEN/TS 1992-4: 2009 part 5	$k^{1)} = k_3^{2)}$	[-]	2,0			

¹⁾ Parameter for design according to EOTA Technical Report TR 029.

²⁾ Parameter for design according to CEN/TS 1992-4:2009.

Injection system Hilti HIT-1 / HIT-1 CE

Performances

Characteristic values of resistance under shear loads in non-cracked concrete
Design according to „EOTA Technical Report TR 029, 09/2010“ or “CEN/TS 1992-4:2009”

Annex C 2

Table C3: Displacements under tension load for threaded rod, HIT-V-...¹⁾

HIT-1 / HIT-1 CE with threaded rod, HIT-V-...			M 8	M 10	M 12	M 16
Non-cracked concrete temperature range I: 40°C/24°C						
Displacement	δ_{N0} -factor	[mm/(N/mm ²)]	0,03	0,04	0,05	0,07
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,07	0,08	0,08	0,08
Non-cracked concrete temperature range II: 80°C/50°C						
Displacement	δ_{N0} -factor	[mm/(N/mm ²)]	0,02	0,03	0,03	0,04
	$\delta_{N\infty}$ -factor	[mm/(N/mm ²)]	0,15	0,17	0,17	0,17

¹⁾ Calculation of the displacement

$$\delta_{N0} = \delta_{N0}\text{-factor} \cdot \tau;$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-factor} \cdot \tau;$$

Table C4: Displacements under shear load for threaded rod, HIT-V-...¹⁾

HIT-1 / HIT-1 CE with threaded rod, HIT-V-...			M 8	M 10	M 12	M 16
Displacement	δ_{V0} -factor	[mm/(kN)]	0,02	0,02	0,01	0,01
	$\delta_{V\infty}$ -factor	[mm/(kN)]	0,03	0,02	0,02	0,01

¹⁾ Calculation of the displacement

$$\delta_{V0} = \delta_{V0}\text{-factor} \cdot V;$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-factor} \cdot V;$$

Injection system Hilti HIT-1 / HIT-1 CE

Performances
Displacement

Annex C 3