

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-20/0697
of 15 June 2021

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Connector Hilti HCC-U with Injectionmortar
Hilti HIT-HY 200-R V3, Hilti HIT-RE 500 V3,
Hilti HIT-RE 500 V4 and Hilti HIT-HY 170

Product family
to which the construction product belongs

Connector for Strengthening of existing concrete
structures by concrete overlay

Manufacturer

Hilti Aktiengesellschaft
Feldkircherstrasse 100
9494 SCHAAN
FÜRSTENTUM LIECHTENSTEIN

Manufacturing plant

Hilti Werke

This European Technical Assessment
contains

27 pages including 3 annexes which form an integral part
of this assessment

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

EAD 332347-00-0601, Edition 12/2019

This version replaces

ETA-20/0697 issued on 30 November 2020

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Connector Hilti HCC-U is a headed fastener (threaded rod with nut) made of steel anchored with Injectionmortar Hilti HIT-HY 200-R V3, Hilti HIT-RE 500 V3, Hilti HIT-RE 500 V4 or Hilti HIT-HY 170 into a predrilled cylindrical drill hole in existing concrete. The Hilti HCC-U is connecting two layers of concrete cast at different times (existing concrete and concrete overlay). The side with the anchor head of Hilti HCC-U is finally embedded in the concrete overlay.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Existing concrete: - resistances - edge distance and spacing	See Annex C 1 to C 6 See Annex B 3
Concrete overlay: - resistances - edge distance and spacing	See Annex C 7 See Annex B 3
Shear interface parameter under static and quasi-static and fatigue cyclic loading - material and geometric parameters - factor for fatigue cyclic loading	See Annex C 7 No performance assessed

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with European Assessment Document EAD No. 332347-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.


Issued in Berlin on 15 June 2021 by Deutsches Institut für Bautechnik

Dipl.-Ing. Beatrix Wittstock
Head of Section

beglaubigt:
Tempel

Installed condition

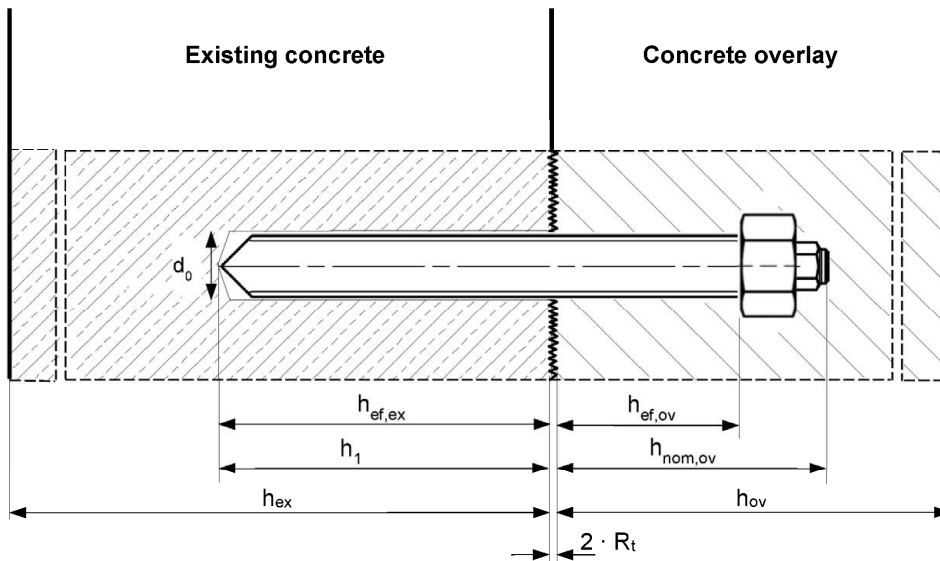Figure A1:
Connector Hilti HCC-U



$h_{ef,ex}$ Effective embedment depth in existing concrete

h_1 Drill hole depth

h_{ex} Thickness of existing concrete

R_t Roughness according to EOTA Technical Report TR 066:2019-10

$h_{ef,ov}$ Effective embedment depth in concrete overlay

$h_{nom,ov}$ Overall embedment depth in the concrete overlay

h_{ov} Thickness of concrete overlay

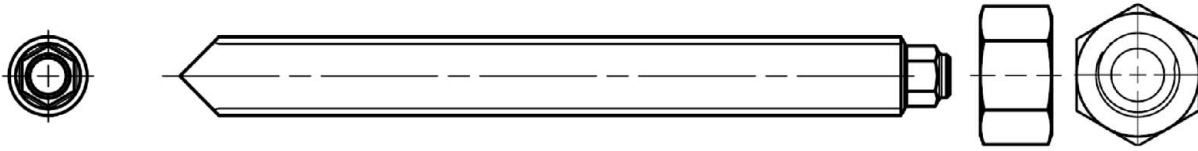
Connector Hilti HCC-U

Product description
Installed condition

Annex A1

Product description: Connector and injection mortar

Steel element HAS-U-....: M8 to M30



Injection mortar Hilti HIT-HY 200-R V3: hybrid system with aggregate

330 ml and 500 ml

Marking:
HILTI HIT
Product number
Production line
Expiry date mm/yyyy



Product name: "Hilti HIT-HY 200-R V3"

Injection mortar Hilti HIT-RE 500 V3: epoxy resin system with aggregate

330 ml, 500 ml and 1400 ml

Marking:
HILTI HIT
Product name
Production time and line
Expiry date mm/yyyy



Product name: "Hilti HIT-RE 500 V3"

Injection mortar Hilti HIT-RE 500 V4: epoxy resin system with aggregate

330 ml, 500 ml and 1400 ml

Marking:
HILTI HIT
Product name
Production time and line
Expiry date mm/yyyy



Product name: "Hilti HIT-RE 500 V4"

Connector Hilti HCC-U

Product description
Steel element / Injection mortar

Annex A2

Injection mortar Hilti HIT-HY 170: hybrid system with aggregate

330 ml and 500 ml

Marking:
HILTI HIT
Product number
Production line
Expiry date mm/yyyy



Product name: "Hilti HIT-HY 170"

Static mixer Hilti HIT-RE-M



Connector Hilti HCC-U

Product description
Injection mortar / Static mixer


Annex A3

Table A1: Materials

Designation	Material
Metal parts made of zinc coated steel	
HAS-U-5.8 (HDG)	Strength class 5.8, $f_{uk} = 500 \text{ N/mm}^2$, $f_{yk} = 400 \text{ N/mm}^2$, Elongation at fracture ($l_0=5d$) > 8% ductile Electroplated zinc coated $\geq 5 \mu\text{m}$, (F) or (HDG) hot dip galvanized $\geq 50 \mu\text{m}$
HAS-U-8.8 (HDG)	Strength class 8.8, $f_{uk} = 800 \text{ N/mm}^2$, $f_{yk} = 640 \text{ N/mm}^2$, Elongation at fracture ($l_0=5d$) > 12% ductile Electroplated zinc coated $\geq 5 \mu\text{m}$, (F) or (HDG) hot dip galvanized $\geq 50 \mu\text{m}$
Nut	Nominal strength class equal or higher to nominal strength class of rod. Electroplated zinc coated $\geq 5 \mu\text{m}$, (F) hot dip galvanized $\geq 50 \mu\text{m}$
Metal parts made of stainless steel	
Corrosion resistance class III according to EN 1993-1-4:2006+A1:2015	
HAS-U A4	For $\leq \text{M24}$: strength class 70, $f_{uk} = 700 \text{ N/mm}^2$, $f_{yk} = 450 \text{ N/mm}^2$; For $> \text{M24}$: strength class 50, $f_{uk} = 500 \text{ N/mm}^2$, $f_{yk} = 210 \text{ N/mm}^2$; Elongation at fracture ($l_0=5d$) > 8% ductile. Stainless steel according to EN 10088-1:2014.
Nut	Nominal strength class equal or higher to nominal strength class of rod. Stainless steel according to EN 10088-1:2014.
Metal parts made of high corrosion resistant steel	
Corrosion resistance class V according to EN 1993-1-4:2006+A1:2015	
HAS-U HCR	For $\leq \text{M20}$: $f_{uk} = 800 \text{ N/mm}^2$, $f_{yk} = 640 \text{ N/mm}^2$, For $> \text{M20}$: $f_{uk} = 700 \text{ N/mm}^2$, $f_{yk} = 400 \text{ N/mm}^2$, Elongation at fracture ($l_0=5d$) > 8% ductile. High corrosion resistant steel according to EN 10088-1:2014.
Nut	Nominal strength class equal or higher to nominal strength class of rod. High corrosion resistant steel according to EN 10088-1:2014.

Table A2: Specification

Connector Hilti HCC-U			M8	M10	M12	M16	M20	M24	M27	M30
Overall length	L	[mm]	80 to 500							
Diameter of the head (nut)	d_h	[mm]	13	17	19	24	30	36	41	46
Thickness of the head (nut)	t_h	[mm]	6,5	8	10	13	16	19	22	24
Thickness of the hexagonal pin	t_p	[mm]	7	9	10,5	8	10	12	14,5	16

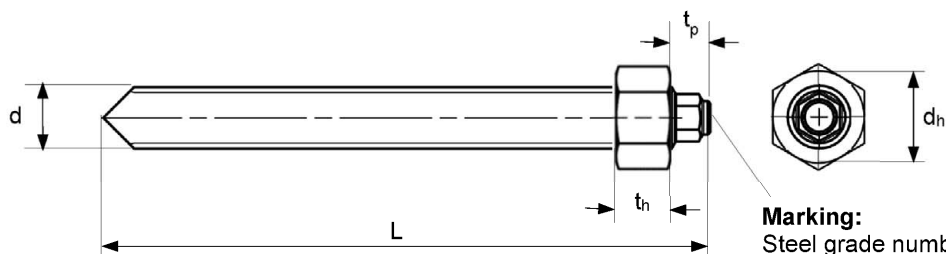

Marking:
Steel grade number and
length identification letter:
e.g. 8L

Connector Hilti HCC-U

Product description
Materials / Specification

Annex A4

Specifications of intended use

Anchorage subject to:

- static and quasi static loading
 - surface roughness “very smooth” to “very rough” of the shear interface according to EOTA Technical Report TR 066:2019-10

Base material (existing concrete and concrete overlay):

- Compacted reinforced or unreinforced normal weight concrete without fibres according to EN 206:2013+A1:2016.
- Strength classes C20/25 to C50/60 according to EN 206:2013+A1:2016.
- Cracked and uncracked concrete.

Temperature in the base material (existing concrete):

For use with HIT-HY 200-R V3

- **at installation:**
-10 °C to +40 °C for the standard variation of temperatures after installation
- **in-service:**
 - Temperature range I: -40 °C to +40 °C
(max. long term temperature +24 °C and max. short term temperature +40 °C)
 - Temperature range II: -40 °C to +80 °C
(max. long term temperature +50 °C and max. short term temperature +80 °C)
 - Temperature range III: -40 °C to +120 °C
(max. long term temperature +72 °C and max. short term temperature +120 °C)

For use with HIT-RE 500 V3

- **at installation:**
-5 °C to +40 °C for the standard variation of temperatures after installation
- **in-service:**
 - Temperature range I: -40 °C to +40 °C
(max. long term temperature +24 °C and max. short term temperature +40 °C)
 - Temperature range II: -40 °C to +70 °C
(max. long term temperature +43 °C and max. short term temperature +70 °C)

For use with HIT-RE 500 V4

- **at installation:**
-5 °C to +40 °C for the standard variation of temperatures after installation
- **in-service:**
 - Temperature range I: -40 °C to +40 °C
(max. long term temperature +24 °C and max. short term temperature +40 °C)
 - Temperature range II: -40 °C to +55 °C
(max. long term temperature +43 °C and max. short term temperature +55 °C)
 - Temperature range III: -40 °C to +75 °C
(max. long term temperature +43 °C and max. short term temperature +75 °C)

For use with HIT-HY 170

- **at installation:**
0 °C to +40 °C for the standard variation of temperatures after installation
- **in-service:**
 - Temperature range I: -40 °C to +40 °C
(max. long term temperature +24 °C and max. short term temperature +40 °C)
 - Temperature range II: -40 °C to +80 °C
(max. long term temperature +50 °C and max. short term temperature +80 °C)

Connector Hilti HCC-U

Intended use
Installation parameters

Annex B1

Design:

- The design of an anchorage and the specification of the fastener is under the control of an engineer experienced in anchorages and concrete work.
- Post-installed shear connections are designed in accordance with EOTA Technical Report TR 066:2019-10.
- For the concrete overlay following requirements on the mixture apply:
 - Concrete compressive strength of the new concrete shall be higher than the concrete compressive strength of the existing concrete.
 - Use of concrete with low shrinkage is recommended.
 - Slump of fresh concrete $f \geq 380$ mm, a slump value $f \geq 450$ mm is recommended, if applicable.

Installation:

- Use category (existing concrete):
 - dry or wet concrete condition: all injection mortars.
 - water-filled drill holes: HIT-RE 500 V3 and HIT-RE 500 V4 only, for hammer drilling only, for uncracked concrete only.
- Installation direction in existing concrete is downward and horizontal and upwards (e.g. overhead) installation (D3).
- The fastener installation is executed by trained personnel, ensuring that the Installation instruction and the specifications by the engineer are observed.
- The requirements for construction works given in EOTA Technical Report TR 066:2019-10 have to be considered.

Connector Hilti HCC-U	Annex B2
Intended use Installation parameters	

Table B1: Installation parameters of connector Hilti HCC-U in existing concrete

Connector Hilti HCC-U		M8	M10	M12	M16	M20	M24	M27	M30
Effective embedment depth and drill hole depth	$h_{ef,ex}$ [mm] $= h_1$	60 bis 160	60 bis 200	70 bis 240	80 bis 320	90 bis 400	96 bis 480	108 bis 540	120 bis 600
Nominal diameter of drill bit	d_0 [mm]	10	12	14	18	22	28	30	35
Minimum thickness of existing concrete	$h_{min,ex}$ [mm]	max (100; $h_{ef} + 30$, $h_{ef} + 2 \cdot d_0$)							
Minimum spacing	$s_{min,ex}$ [mm]	40	50	60	75	90	115	120	140
Minimum edge distance	$c_{min,ex}$ [mm]	40	45	45	50	55	60	75	80


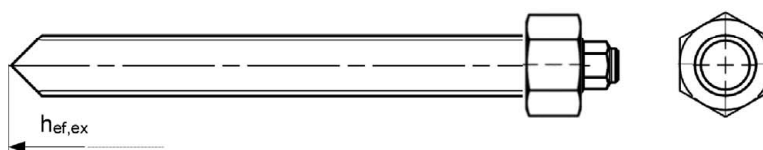


Table B2: Installation parameters of connector Hilti HCC-U in concrete overlay

Connector Hilti HCC-U		M8	M10	M12	M16	M20	M24	M27	M30
Effective embedment depth	$h_{ef,ov}$ [mm]	≥ 40							
Overall embedment depth	$h_{nom,ov}$ [mm]	$L - h_{ef,ex} - 2 \cdot R_t^{1)}$							
Minimum thickness of concrete overlay	$h_{min,ov}$ [mm]	$h_{nom,ov} + c_{nom}^{2)}$							
Minimum spacing	$s_{min,ov}$ [mm]	35	40	45	55	70	80	95	105
Minimum edge distance	$c_{min,ov}$ [mm]	10 + $c_{nom}^{2)}$	10 + $c_{nom}^{2)}$	15 + $c_{nom}^{2)}$	15 + $c_{nom}^{2)}$	20 + $c_{nom}^{2)}$	20 + $c_{nom}^{2)}$	25 + $c_{nom}^{2)}$	30 + $c_{nom}^{2)}$

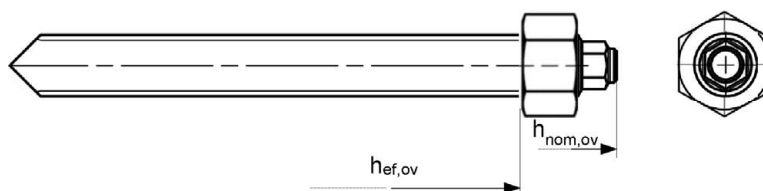

- 1) R_t : Roughness according to EOTA Technical Report TR 066:2019-10.
2) c_{nom} : Minimum concrete cover according to EN 1992-1-1:2004 + AC:2010.

Connector Hilti HCC-U

Intended use
Installation parameters

Annex B3

Table B3: Working time and curing time for Hilti HIT-HY 200-R V3¹⁾

Temperature in the base material T	Maximum working time t _{work}	Minimum curing time t _{cure}
-10 °C to -5 °C	3 hours	20 hours
> -5 °C to 0 °C	1,5 hours	8 hours
> 0 °C to 5 °C	45 min	4 hours
> 5 °C to 10 °C	30 min	2,5 hours
> 10 °C to 20 °C	15 min	1,5 hours
> 20 °C to 30 °C	9 min	1 hour
> 30 °C to 40 °C	6 min	1 hour

¹⁾ The minimum temperature of the foil pack is 0° C.

**Table B4: Working time and curing time for Hilti HIT-RE 500 V3 and
Hilti HIT-RE 500 V4 ¹⁾²⁾**

Temperature in the base material T	Maximum working time t _{work}	Minimum curing time t _{cure}
-5 °C to -1 °C	2 hours	168 hours
0 °C to 4 °C	2 hours	48 hours
5 °C to 9 °C	2 hours	24 hours
10 °C to 14 °C	1,5 hours	16 hours
15 °C to 19 °C	1 hour	16 hours
20 °C to 24 °C	30 min	7 hours
25 °C to 29 °C	20 min	6 hours
30 °C to 34 °C	15 min	5 hours
35 °C to 39 °C	12 min	4,5 hours
40 °C	10 min	4 hours

¹⁾ The curing time data are valid for dry base material only. In wet base material the curing times must be doubled.

²⁾ The minimum temperature of the foil pack is +5° C.

Table B5: Working time and curing time for Hilti HIT-HY 170 ¹⁾

Temperature in the base material T ²⁾	Maximum working time t _{work}	Minimum curing time t _{cure}
0 °C to 5 °C	10 min	5 hours
> 5 °C to 10 °C	8 min	2,5 hours
> 10 °C to 20 °C	5 min	1,5 hours
> 20 °C to 30 °C	3 min	45 min
> 30 °C to 40 °C	2 min	30 min

¹⁾ The curing time data are valid for dry base material only. In wet base material the curing times must be doubled.

²⁾ The minimum temperature of the foil pack is +5° C.

Connector Hilti HCC-U

Intended use

Overview of installation options / Parameters of cleaning and setting tools

Annex B4

Table B6: Overview of installation options
















Concrete condition	Drilling	Cleaning	HCC-U with ...			
			HIT-HY 200-R V3	HIT-RE 500 V3	HIT-RE 500 V4	HIT-HY 170
Dry / wet	Hammer drilling with hollow drill bit TE-CD or TE-YD 	Automatic	✓	✓	✓	✓
	Hammer drilling 	Manual cleaning	✓	-	-	✓
		Compressed air cleaning	✓	✓	✓	✓
	Diamond coring with roughening tool TE-YRT 	Cleaning of diamond cored holes with roughening	✓	✓	✓	-
Diamond coring 		Cleaning of diamond cored holes	-	✓	✓	-
Water-filled drill hole	Hammer drilling 	Cleaning for hammer drilled water-filled holes	-	✓	✓	-

Table B7: Parameters of cleaning and setting tools

Elements	Drill and clean					Installation
	Hammer drilling		Diamond coring		Brush	
HCC-U		Hollow drill bit TE-CD, TE-YD ¹⁾ 		Roughening tool TE-YRT 		Piston plug 
						
size	d ₀ [mm]	d ₀ [mm]	d ₀ [mm]	d ₀ [mm]	HIT-RB	HIT-SZ
M8	10	-	10		10	-
M10	12	12	12	-	12	12
M12	14	14	14	-	14	14
M16	18	18	18	18	18	18
M20	22	22	22	22	22	22
M24	28	28	28	28	28	28
M27	30	-	30	30	30	30
M30	35	35	35	35	35	35

¹⁾ With vacuum cleaner Hilti VC 20/40/60 (automatic filter cleaning activated) or vacuum cleaner with activated automatic filter cleaning as well as volumetric flow rate at turbine ≥ 57 l/s, volumetric flow rate at end of hose ≥ 106 m³/h and partial vacuum ≥ 16 kPa.

Connector Hilti HCC-U

Intended use

Overview of installation options / Parameters of cleaning and setting tools

Annex B5

Table B8: Cleaning alternatives







<p>Manual Cleaning (MC) Hilti hand pump for blowing out drill holes with diameters $d_0 \leq 20$ mm and drill hole depths $h_0 \leq 10 \cdot d$.</p>	
<p>Compressed air cleaning (CAC): Air nozzle with an orifice opening of minimum 3,5 mm in diameter.</p>	
<p>Automatic Cleaning (AC): Cleaning is performed during drilling with Hilti TE-CD and TE-YD drilling system including vacuum cleaner.</p>	

Table B9: Parameters for use of the Hilti Roughening tool TE-YRT

Associated components			
Diamond coring		Roughening tool TE-YRT	Wear gauge RTG...
			
d_0 [mm]		d_0 [mm]	size
nominal	measured		
18	17,9 to 18,2	18	18
22	21,9 to 22,2	22	22
28	27,9 to 28,2	28	28
30	29,9 to 30,2	30	30
35	34,9 to 35,2	35	35

Connector Hilti HCC-U

Intended use


Cleaning alternatives / Parameters for use of roughening tool

Annex B6

Table B10: Installation parameters for use of the Hilti Roughening tool TE-YRT

	Roughening time t_{roughen}	Minimum blowing time t_{blowing}
h_{ef} [mm]	$t_{\text{roughen}} [\text{sec}] = h_{\text{ef}} [\text{mm}] / 10$	$t_{\text{blowing}} [\text{sec}] = t_{\text{roughen}} [\text{sec}] + 20$
0 to 100	10	30
101 to 200	20	40
201 to 300	30	50
301 to 400	40	60
401 to 500	50	70
501 to 600	60	80

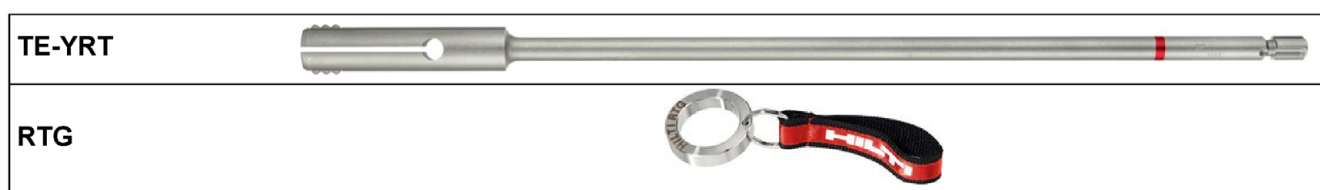Table B11: Hilti Roughening tool TE-YRT and wear gauge RTG



Connector Hilti HCC-U

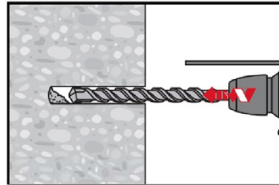
Intended use
Parameters for use of roughening tool

Annex B7

Installation instruction


Hole drilling

a) Hammer drilling




Drill hole to the required embedment depth with a hammer drill set in rotation-hammer mode using an appropriately sized carbide drill bit.

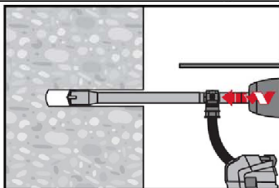b) Hammer drilling with Hilti hollow drill bit




Drill hole to the required embedment depth with an appropriately sized Hilti TE-CD or TE-YD hollow drill bit attached to Hilti vacuum cleaner VC 20/40/60 or a vacuum cleaner acc. to Table B7 with automatic filter cleaning activated. This drilling system removes the dust and cleans the drill hole during drilling when used in accordance with the user's manual. After drilling is completed, proceed to the "injection preparation" step in the installation instruction.

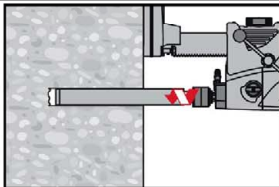c) Diamond coring with roughening with Hilti Roughening tool TE-YRT:




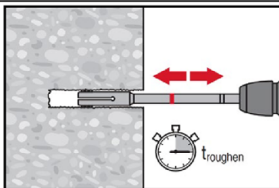Diamond coring is permissible when suitable diamond core drilling machines and the corresponding core bits are used.
For the use in combination with Hilti Roughening tool TE-YRT see parameters in Table B9.



Before roughening water needs to be removed from the drill hole.
Check usability of the roughening tool with the wear gauge RTG.
Roughen the drill hole over the whole length to the required h_{ef} .

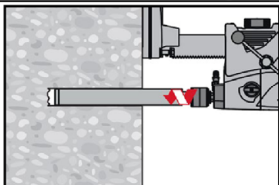d) Diamond coring:




Diamond coring is permissible when suitable diamond core drilling machines and the corresponding core bits are used.

Drill hole cleaning

Just before setting an anchor, the drill hole must be free of dust and debris.
Inadequate hole cleaning = poor load values.

Manual Cleaning (MC)

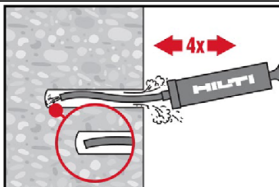Uncracked concrete only. For drill hole diameters $d_0 \leq 20$ mm and drill hole depths $h_0 \leq 10 \cdot d$.



The Hilti hand pump may be used for blowing out drill holes up to diameters $d_0 \leq 20$ mm and drill hole depths $h_0 \leq 10 \cdot d$.
Blow out at least 4 times from the back of the drill hole until return air stream is free of noticeable dust.

Connector Hilti HCC-U


Intended use
Installation instructions

Annex B8

	<p>Brush 4 times with the specified brush (see Table B7) by inserting the steel brush Hilti HIT-RB to the back of the hole (if needed with extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.</p>
	<p>Blow out again with the Hilti hand pump at least 4 times until return air stream is free of noticeable dust.</p>
<p>Compressed air cleaning (CAC) for all drill hole diameters d_0 and all drill hole depths h_0</p>	
	<p>Blow 2 times from the back of the hole (if needed with nozzle extension) over the hole length with oil-free compressed air (min. 6 bar at 6 m³/h) until return air stream is free of noticeable dust. For drill hole diameters \geq 32 mm the compressor has to supply a minimum air flow of 140 m³/h.</p>
	<p>Brush 2 times with the specified brush (see Table B7) by inserting the steel brush Hilti HIT-RB to the back of the hole (if needed with extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.</p>
	<p>Blow again with compressed air 2 times until return air stream is free of noticeable dust.</p>
<p>Cleaning of diamond cored holes with roughening with Hilti Roughening tool TE-YRT.</p>	
	<p>Flush 2 times by inserting a water hose (water-line pressure) to the back of the hole until water runs clear.</p>
	<p>Brush 2 times with the specified brush (see Table B7) by inserting the steel brush Hilti HIT-RB to the back of the hole (if needed with extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.</p>
<p>Connector Hilti HCC-U</p>	
<p>Intended use Installation instructions</p>	<p>Annex B9</p>


	<p>Blow 2 times from the back of the hole (if needed with nozzle extension) over the whole length with oil-free compressed air (min. 6 bar at 6 m³/h) until return air stream is free of noticeable dust and water. Remove all water from the drill hole until drill hole is completely dried before mortar injection. For drill hole diameters ≥ 32 mm the compressor has to supply a minimum air flow of 140 m³/h.</p>
<p>Cleaning of hammer drilled water-filled drill holes and diamond cored holes: For all drill hole diameters d_0 and all drill hole depths h_0.</p>	
	<p>Flush 2 times by inserting a water hose (water-line pressure) to the back of the hole until water runs clear.</p>
	<p>Brush 2 times with the specified brush (see Table B7) by inserting the steel brush Hilti HIT-RB to the back of the hole (if needed with extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole (brush $\varnothing \geq$ drill hole \varnothing) - if not the brush is too small and must be replaced with the proper brush diameter.</p>
	<p>Flush 2 times by inserting a water hose (water-line pressure) to the back of the hole until water runs clear.</p>
	<p>Blow 2 times from the back of the hole (if needed with nozzle extension) over the whole length with oil-free compressed air (min. 6 bar at 6 m³/h) until return air stream is free of noticeable dust and water. For drill hole diameters ≥ 32 mm the compressor has to supply a minimum air flow of 140 m³/h.</p>
	<p>Brush 2 times with the specified brush size (brush $\varnothing \geq$ drill hole \varnothing, see Table B7) by inserting the steel brush Hilti HIT-RB to the back of the hole (if needed with extension) in a twisting motion and removing it. The brush must produce natural resistance as it enters the drill hole – if not the brush is too small and must be replaced with the proper brush diameter.</p>
	<p>Blow again with compressed air 2 times until return air stream is free of noticeable dust and water.</p>
<p>Connector Hilti HCC-U</p>	
<p>Intended use Installation instructions</p>	<p>Annex B10</p>

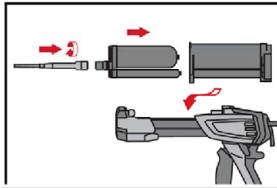Injection preparation




Tightly attach Hilti mixing nozzle HIT-RE-M to foil pack manifold. Do not modify the mixing nozzle.
Observe the instruction for use of the dispenser.
Check foil pack holder for proper function. Insert foil pack into foil pack holder and put holder into dispenser.

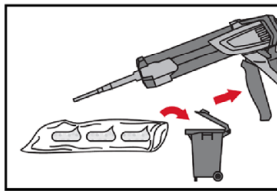The foil pack opens automatically as dispensing is initiated. Depending on the size of the foil pack, an initial amount of adhesive has to be discarded. Discarded quantities are:




- for use with **HIT-HY 200-R V3**:
2 strokes for 330 ml foil pack,
3 strokes for 500 ml foil pack,
4 strokes for 500 ml foil pack ≤ 5 °C.
The minimum foil pack temperature is 0° C.
- for use with **HIT-RE 500 V3** and **HIT-RE 500 V4**:
3 strokes for 330 ml foil pack,
4 strokes for 500 ml foil pack,
65 ml for 1400 ml foil pack
The minimum foil pack temperature is +5° C.
- for use with **HIT-HY 170**:
2 strokes for 330 ml foil pack,
3 strokes for 500 ml foil pack,
The minimum foil pack temperature is 0° C.

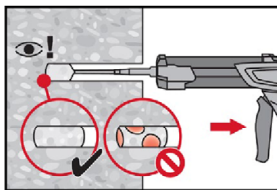
Inject adhesive from the back of the drill hole without forming air voids.



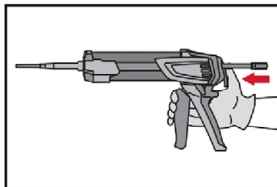Inject the adhesive starting at the back of the hole, slowly withdrawing the mixer with each trigger pull.
Fill approximately 2/3 of the drill hole to ensure that the annular gap between the anchor and the concrete is completely filled with adhesive along the embedment length.
In water saturated concrete it is required to set the fastener immediately after cleaning the drill hole.



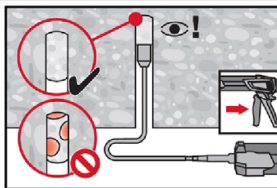After injection is completed, depressurize the dispenser by pressing the release trigger. This will prevent further adhesive discharge from the mixer.




Overhead installation and/or installation with embedment depth $h_{ef} > 250\text{mm}$.
For overhead installation the injection is only possible with the aid of extensions and piston plugs. Assemble HIT-RE-M mixer, extension(s) and appropriately sized piston plug (see Table B7). Insert piston plug to back of the hole and inject adhesive. During injection the piston plug will be naturally extruded out of the drill hole by the adhesive pressure.

Connector Hilti HCC-U


Intended use
Installation instructions

Annex B11

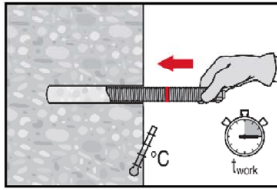
Setting the element



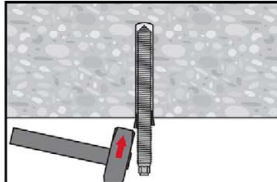
Before use, verify that the element is dry and free of oil and other contaminants. Mark and set element to the required embedment depth before working time t_{work} has elapsed. The working time t_{work} is given in Table B3, Table B4 and Table B5.



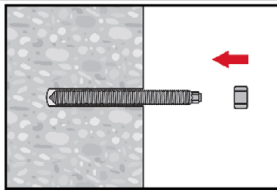For overhead installation use piston plugs and fix embedded parts with e.g. wedges (Hilti HIT-OHW).




Assembly of the nut.

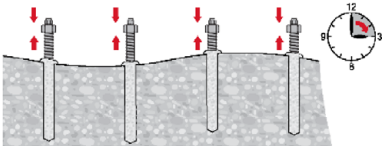

Levelling of the nut to ensure the required embedment depth.

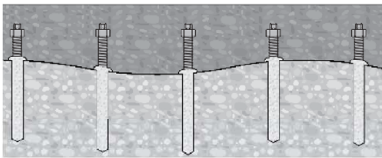Observe the curing time t_{cure} , which varies according to temperature of base material (see Table B3, Table B4 and Table B5). After t_{cure} has elapsed the concrete overlay can be concreted.



Observe the required condition of the surface before concreting and the use of the correct concrete composition.

For requirements on concrete composition see EOTA TR 066:2019-10.


Connector Hilti HCC-U

Intended use
Installation instructions

Annex B12

Table C1: Essential characteristics of connector Hilti HCC-U under tension load in existing concrete

Connector Hilti HCC-U			M8	M10	M12	M16	M20	M24	M27	M30	
Steel failure											
Characteristic resistance	$N_{Rk,s,ex}$	[kN]	$A_s \cdot f_{uk}$								
Partial factor HAS-U-5.8 (HDG)	$\gamma_{Ms,N,ex}$	[-]	1,5								
Partial factor HAS-U-8.8 (HDG)	$\gamma_{Ms,N,ex}$	[-]	1,5								
Partial factor HAS-U A4	$\gamma_{Ms,N,ex}$	[-]	1,86						2,86		
Partial factor HAS-U HCR	$\gamma_{Ms,N,ex}$	[-]	1,5				2,1				
Concrete cone failure											
Factor for cracked concrete	$k_{Cr,N,ex}$	[-]	7,7								
Factor for uncracked concrete	$k_{Ucr,N,ex}$	[-]	11,0								
Edge distance	$c_{Cr,N,ex}$	[mm]	$1,5 \cdot h_{ef,ex}$								
Spacing	$s_{Cr,N,ex}$	[mm]	$3,0 \cdot h_{ef,ex}$								
Splitting failure											
Edge distance $c_{Cr,sp,ex}$ [mm] for	$h / h_{ef,ex} \geq 2,0$		$1,0 \cdot h_{ef,ex}$								
	$2,0 > h / h_{ef,ex} > 1,3$		$4,6 \cdot h_{ef,ex} - 1,8 \cdot h$								
	$h / h_{ef,ex} \leq 1,3$		$2,26 \cdot h_{ef,ex}$								
Spacing	$s_{Cr,sp,ex}$	[mm]	$2,0 \cdot c_{Cr,sp,ex}$								

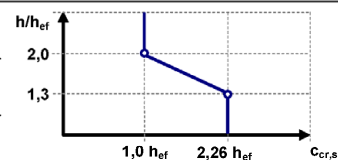

Connector Hilti HCC-U

Performance
Essential characteristics under tension load in existing concrete

Annex C1

Table C1 continued (1)

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30
Installation factor for HCC-U with HIT-HY 200-R V3											
Hammer drilling	γ_{inst}	[-]		1,0							
Hammer drilling with Hilt hollow drill bit TE-CD or TE-YD	γ_{inst}	[-]	1)	1,0							
Diamond coring with roughening with Hilti Roughening tool TE-YRT	γ_{inst}	[-]	1)	1,0							
Combined pullout and concrete cone failure for HCC-U with HIT-HY 200-R V3											
Characteristic bond resistance in cracked concrete C20/25											
Temperature range I:	40 °C / 24 °C	$\tau_{Rk,cr}$	[N/mm ²]	7,5			8,5			9,0	
Temperature range II:	80 °C / 50 °C	$\tau_{Rk,cr}$	[N/mm ²]	6,0			7,0			7,5	
Temperature range III:	120 °C / 72 °C	$\tau_{Rk,cr}$	[N/mm ²]	5,5			6,0			6,5	
Characteristic bond resistance in uncracked concrete C20/25											
Temperature range I:	40 °C / 24 °C	$\tau_{Rk,ucr}$	[N/mm ²]	18							
Temperature range II:	80 °C / 50 °C	$\tau_{Rk,ucr}$	[N/mm ²]	15							
Temperature range III:	120 °C / 72 °C	$\tau_{Rk,ucr}$	[N/mm ²]	13							
Influence factors ψ on bond resistance τ_{Rk}											
Factor for concrete strength											
Cracked and uncracked concrete	$\psi_{c,ex}$	C30/37		1,04							
		C40/50		1,07							
		C50/60		1,10							
Sustained load factor											
Cracked and uncracked concrete	ψ_{sus}^0	40 °C / 24 °C		0,74							
		80 °C / 50 °C		0,89							
		120 °C / 72 °C		0,72							

Connector Hilti HCC-U

Performance

Essential characteristics under tension load in existing concrete

Annex C2

Table C1 continued (2)

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30	
Installation factor for HCC-U with HIT-RE 500 V3												
Hammer drilling	γ_{inst}	[-]		1,0								
Hammer drilling with Hilti hollow drill bit TE-CD or TE-YD	γ_{inst}	[-]	1)	1,0								
Diamond coring	γ_{inst}	[-]		1,2							1,4	
Diamond coring with roughening with Hilti Roughening tool TE-YRT	γ_{inst}	[-]	1)	1,0								
Hammer drilling in water-filled drill holes	γ_{inst}	[-]		1,4								
Combined pullout and concrete cone failure HCC-U with HIT-RE 500 V3												
Characteristic bond resistance in cracked concrete C20/25 in hammer drilled holes and hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and diamond cored holes with roughening with Hilti Roughening tool TE-YRT												
Temperature range I:	40 °C / 24 °C	$\tau_{RK,cr}$	[N/mm ²]	7,5	8,0	9,5	9,5	9,5	8,5	9,0	8,5	
Temperature range II:	70 °C / 43 °C	$\tau_{RK,cr}$	[N/mm ²]	6,0	7,0	7,5	7,5	7,5	7,0	7,0	6,5	
Characteristic bond resistance in uncracked concrete C20/25 in hammer drilled holes and hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and diamond cored holes with roughening with Hilti Roughening tool TE-YRT												
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	19	18	18	17	16	15	15	14	
Temperature range II:	70 °C / 43 °C	$\tau_{RK,ucr}$	[N/mm ²]	14	14	14	13	12	12	11	11	
Characteristic bond resistance in uncracked concrete C20/25 in diamond cored holes												
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	13	13	13	13	12	12	12	12	
Temperature range II:	70 °C / 43 °C	$\tau_{RK,ucr}$	[N/mm ²]	10	9,5	9,5	9,5	9,0	9,0	9,0	9,0	
Characteristic bond resistance in uncracked concrete C20/25 in hammer drilled holes and installation in water-filled drill holes												
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	16	16	15	15	14	13	12	12	
Temperature range II:	70 °C / 43 °C	$\tau_{RK,ucr}$	[N/mm ²]	12	12	12	11	10	10	9,5	9,5	
Influence factors ψ on bond resistance τ_{RK}												
Factor for concrete strength												
Cracked and uncracked concrete	in hammer drilled holes, hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and diamond cored holes	$\psi_{c,ex}$	C30/37	1,04								
			C40/50	1,07								
			C50/60	1,10								
	in diamond cored holes with roughening with Hilti Roughening tool TE-YRT	$\psi_{c,ex}$	C30/37	1)	1,0							
			C40/50									
			C50/60									
Sustained load factor												
Cracked and uncracked concrete	in hammer drilled holes, hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and in diamond cored holes with roughening with Hilti Roughening tool TE-YRT	$\psi^{0,sus}$	40 °C / 24 °C	0,88								
			70 °C / 43 °C	0,70								

Connector Hilti HCC-U

Performance
Essential characteristics under tension load in existing concrete

Annex C3

Table C1 continued (3)

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30
Installation factor for HCC-U with HIT-RE 500 V4											
Hammer drilling	γ_{inst}	[-]		1,0							
Hammer drilling with Hilti hollow drill bit TE-CD or TE-YD	γ_{inst}	[-]	1)	1,0							
Diamond coring	γ_{inst}	[-]		1,2							1,4
Diamond coring with roughening with Hilti Roughening tool TE-YRT	γ_{inst}	[-]	1)	1,0							
Hammer drilling in water-filled drill holes	γ_{inst}	[-]		1,4							
Combined pullout and concrete cone failure HCC-U with HIT-RE 500 V4											
Characteristic bond resistance in cracked concrete C20/25 in hammer drilled holes and hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and diamond cored holes with roughening with Hilti Roughening tool TE-YRT											
Temperature range I:	40 °C / 24 °C	$\tau_{RK,cr}$	[N/mm ²]	7,5	9,0	11	11	10	9,5	9,0	8,5
Temperature range II:	55 °C / 43 °C	$\tau_{RK,cr}$	[N/mm ²]	7,0	8,0	9,0	8,5	8,0	8,0	7,5	7,0
Temperature range III:	75 °C / 55 °C	$\tau_{RK,cr}$	[N/mm ²]	4,0	3,5	3,5	3,5	3,0	3,0	3,0	3,0
Characteristic bond resistance in uncracked concrete C20/25 in hammer drilled holes and hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and diamond cored holes with roughening with Hilti Roughening tool TE-YRT											
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	19	18	18	17	16	15	15	14
Temperature range II:	55 °C / 43 °C	$\tau_{RK,ucr}$	[N/mm ²]	16	15	15	14	13	13	12	12
Temperature range III:	75 °C / 55 °C	$\tau_{RK,ucr}$	[N/mm ²]	6,0	6,0	6,0	5,5	5,0	5,0	4,5	4,5
Characteristic bond resistance in uncracked concrete C20/25 in diamond cored holes											
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	13	13	13	13	12	12	12	12
Temperature range II:	55 °C / 43 °C	$\tau_{RK,ucr}$	[N/mm ²]	12	12	11	11	11	11	11	10
Temperature range III:	75 °C / 55 °C	$\tau_{RK,ucr}$	[N/mm ²]	6,0	5,5	5,5	5,5	5,5	5,5	5,5	5,0
Characteristic bond resistance in uncracked concrete C20/25 in hammer drilled holes and installation in water-filled drill holes											
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	16	16	15	15	14	13	12	12
Temperature range II:	55 °C / 43 °C	$\tau_{RK,ucr}$	[N/mm ²]	13	13	13	12	11	11	10	10
Temperature range III:	75 °C / 55 °C	$\tau_{RK,ucr}$	[N/mm ²]	5,0	5,0	5,0	4,5	4,5	4,0	4,0	4,0

Connector Hilti HCC-U

Performance
Essential characteristics under tension load in existing concrete

Annex C4

Table C1: continued (4)

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30
Influence factors ψ on bond resistance τ_{Rk}											
Factor for concrete strength											
Cracked and uncracked concrete	in hammer drilled holes, hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and diamond cored holes	$\psi_{c,ex}$	C30/37	1,04							
			C40/50	1,07							
			C50/60	1,10							
	in diamond cored holes with roughening with Hilti Roughening tool TE-YRT	$\psi_{c,ex}$	C30/37	1)				1,0			
			C40/50								
			C50/60								
Sustained load factor											
Cracked and uncracked concrete	in hammer drilled holes, hammer drilled holes with Hilti hollow drill bit TE-CD or TE-YD and in diamond cored holes with roughening with Hilti Roughening tool TE-YRT	ψ_{sus}^0	40 °C / 24 °C	0,88							
			55 °C / 43 °C	0,72							
			75 °C / 55 °C	0,69							
	in diamond cored holes		40 °C / 24 °C	0,89							
			55 °C / 43 °C	0,70							
			75 °C / 55 °C	0,62							

Connector Hilti HCC-U

Performance
Essential characteristics under tension load in existing concrete

Annex C5

Table C1: continued (5)

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30
Installation factor for HCC-U with HIT-HY 170											
Hammer drilling	γ_{inst}	[-]		1,0						1)	
Hammer drilling with Hilti hollow drill bit TE-CD or TE-YD	γ_{inst}	[-]		1,0						1)	
Combined pullout and concrete cone failure HCC-U with HIT-HY 170											
Characteristic bond resistance in cracked concrete C20/25											
Temperature range I:	40 °C / 24 °C	$\tau_{RK,cr}$	[N/mm ²]	1)	5,5				1)		
Temperature range II:	80 °C / 50 °C	$\tau_{RK,cr}$	[N/mm ²]	1)	4,0				1)		
Characteristic bond resistance in uncracked concrete C20/25											
Temperature range I:	40 °C / 24 °C	$\tau_{RK,ucr}$	[N/mm ²]	10						1)	
Temperature range II:	80 °C / 50 °C	$\tau_{RK,ucr}$	[N/mm ²]	7,5						1)	
Influence factors ψ on bond resistance τ_{RK}											
Factor for concrete strength											
Cracked and uncracked concrete	$\psi_{c,ex}$		C30/37	1,04						1)	
			C40/50	1,07						1)	
			C50/60	1,10						1)	
Sustained load factor											
Cracked and uncracked concrete	ψ^{0}_{sus}		40 °C / 24 °C	0,95						1)	
			80 °C / 50 °C	0,79						1)	

1) No performance assessed.

Connector Hilti HCC-U

Performance
Essential characteristics under tension load in existing concrete

Annex C6

Table C2: Essential characteristics of connector Hilti HCC-U under tension load in concrete overlay

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30
Steel failure											
Characteristic resistance	$N_{Rk,s,ov}$	[kN]	$A_s f_{uk}$								
Partial factor HAS-U-5.8 (HDG)	$\gamma_{Ms,N,ov}$	[-]	1,5								
Partial factor HAS-U-8.8 (HDG)	$\gamma_{Ms,N,ov}$	[-]	1,5								
Partial factor HAS-U A4	$\gamma_{Ms,N,ov}$	[-]	1,86							2,86	
Partial factor HAS-U HCR	$\gamma_{Ms,N,ov}$	[-]	1,5					2,1			
Pullout failure for anchor heads											
Projected area of the head	A_h	[mm ²]	82	148	170	251	393	565	748	955	
Thickness of the head	t_h	[mm]	6,5	8	10	13	16	19	22	24	
Concrete cone failure											
Effective embedment depth	$h_{ef,ov}$	[mm]	≥ 40								
Factor for cracked concrete	$k_{cr,N,ov}$	[-]	8,9								
Factor for uncracked concrete	$k_{ucr,N,ov}$	[-]	12,7								
Edge distance	$c_{cr,N,ov}$	[mm]	$1,5 \cdot h_{ef,ov}$								
Spacing	$s_{cr,N,ov}$	[mm]	$3,0 \cdot h_{ef,ov}$								
Splitting failure											
Edge distance	$c_{cr,sp,ov}$	[mm]	$3,0 \cdot h_{ef,ov}$								
Spacing	$s_{cr,sp,ov}$	[mm]	$6,0 \cdot h_{ef,ov}$								
Blow-out failure											
Projected area of the head	A_h	[mm ²]	82	148	170	251	393	565	748	955	
Factor for cracked concrete	$k_{5,cr}$	[-]	8,7								
Factor for uncracked concrete	$k_{5,ucr}$	[-]	12,2								

Table C3: Essential characteristics for connector Hilti HCC-U for the shear interface

Connector Hilti HCC-U				M8	M10	M12	M16	M20	M24	M27	M30
Characteristic yield strength	HAS-U-5.8 (HDG)	f_{yk}	[N/mm ²]	400							
	HAS-U-8.8 (HDG)	f_{yk}	[N/mm ²]	640							
	HAS-U A4	f_{yk}	[N/mm ²]	450							210
	HAS-U HCR	f_{yk}	[N/mm ²]	450					210		
Product specific factor for ductility	α_{k1}	[-]	1,0								
Relevant cross section in the area of the interface	A_s	[mm ²]	36,6	58,0	84,3	157	245	235	459	561	
Product specific factor for geometry	α_{k2}	[-]	1,0								

Connector Hilti HCC-U

Performance

Essential characteristics under tension load in concrete overlay
Essential characteristics for the shear interface

Annex C7